




REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		




2P-双卡点


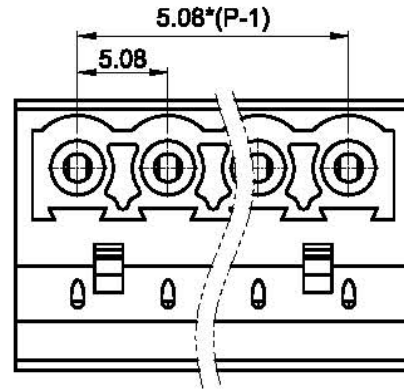


NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 5MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 28-12AWG
7. Screw Torque Value: 0.8 N.m



2P-左单卡点

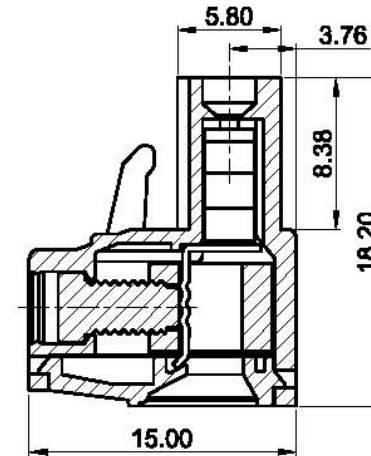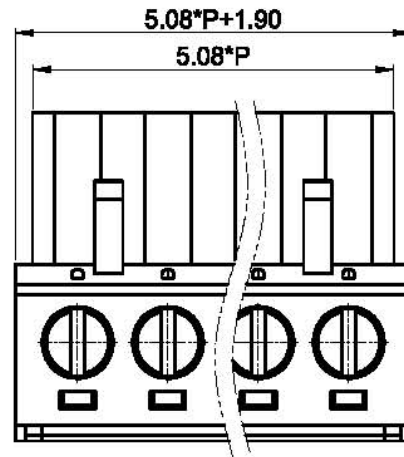

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗5兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 28-12AWG
7. 螺丝扭力: 0.8 N.m

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		◇
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08-夹子	1001B00015V	P	磷青铜	镀金
4	LC1-5.08-铜方块	F1A0BLC5085V	P	黄铜	镀金
3	LC1-5.08-螺丝	SPOYA30S305V	P	碳钢	镀金
2	PT1-5.08-盖子	1130COYXXAV	1	PA66	
1	YL1-5.08-主体	1131A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2015/01/08	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-1130A01 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	YL1-5.08-XXP-1Y-00A YL1-5.08-成品